

Perforated Corrugate

Trapezoidal Corrugate - Perforated cladding designed to match trapezoidal form cladding.

Material = 1.6mm Aluminium with Powder Coated Finish



Perforations are R064C30C that has 6mm round holes and 30% open area.

Colour Finishes

Perforated Trapezoidal Corrugate is offered with a pretreat and powder coat finish.

Dulux Duralloy powder options are available for AAMA 2603 performance.

Dulux Duratec powder options are available for AAMA 2604 performance.

The standard range of colour options matched to colorsteel offerings.

Architecturally designed perforated cladding.


Standard lengths available – 2400mm, 3000mm & 3600mm

Mounting

Perforated Trapezoidal Corrugate is best installed as vertical architectural cladding.

Maximum recommended spans are 1200mm.

Screw fixings should be installed in the middle of each pan at each girt, purlin or rail with 12 or 14 gauge screws.

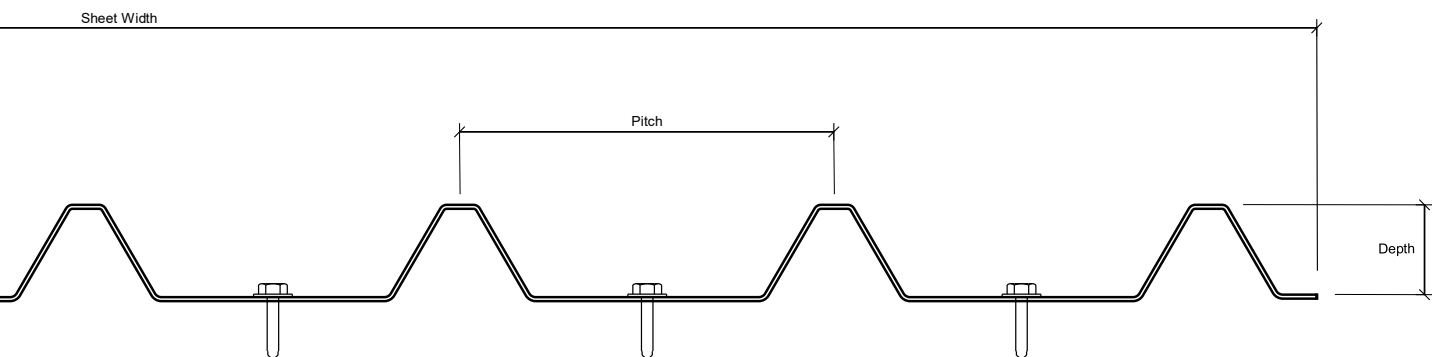

For fixing to steel, Colour-Matched 12-14 x 25mm Hex Washer Face Head Self-Drilling Screws are ideal.



As this product is not available in long-run sheet lengths, butting or overlapping joins are both suitable options.