


Perforated Corrugate

Sinusoidal Corrugate - Perforated sheet, roll-formed to the traditional corrugate profile.

Material = 0.9mm Aluminium with Powder Coat Finish


Perforations

R040A20C / P160C

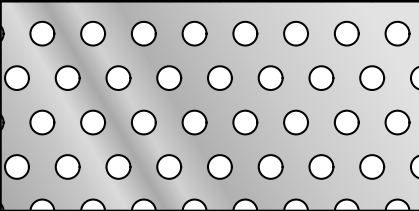


Ø4.00mm @ 8.62mm ctrs
19.5% Open Area

R050C37C / P195C

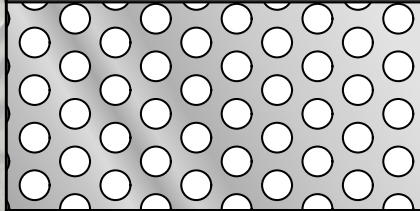

Ø5.00mm @ 7.85mm ctrs
36.8% Open Area

R064C29C / P230C

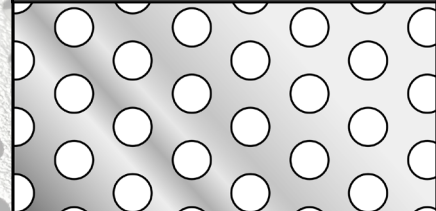

Ø6.35mm @ 11.19mm ctrs
29.2% Open Area

Colour Finishes

Traditional Corrugate is offered with a pretreat and powder coat finish.

Dulux Duralloy powder options are available for AAMA 2603 performance.

Dulux Duratec powder options are available for AAMA 2604 performance.

The standard range of colour options matched to colorsteel offerings.

Architecturally designed perforated cladding.


Standard lengths are 3000mm, although custom lengths can be run for projects.

Mounting

Perforated Traditional Corrugate is best installed as vertical architectural cladding for screening.

Maximum recommended spans are 900mm.

Screw fixings should be installed at each girt, purlin or rail with 12 or 14 gauge screws.

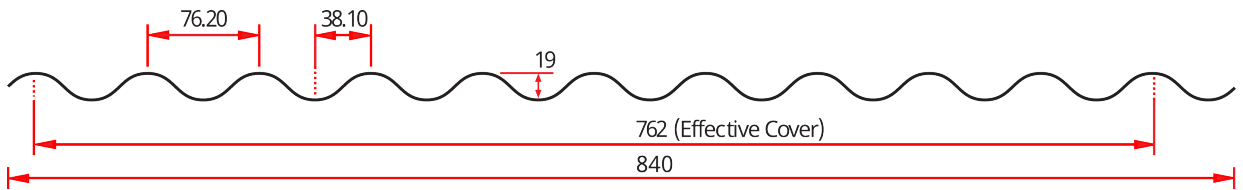

For fixing to steel, Colour-Matched 12-14 x 25mm Hex Washer Face Head Self-Drilling Screws are ideal.

Butting of overlapping joins are both suitable options.



This product can be manufactured in long-run sheet lengths of up to 20m.